




- TERRACOTTA
- QUARRY TILES
- PORCELAIN TILES
- GLAZED CERAMIC TILES
- ACID-RESISTANT STONE SURFACES

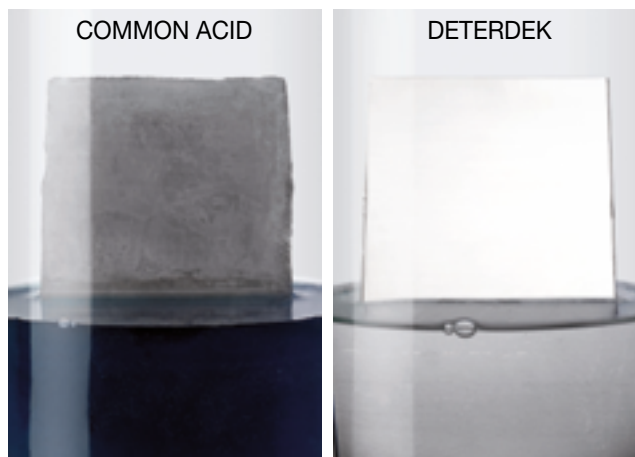

Some acids might damage surfaces, metals and grouting. **DETERDEK** cleans without affecting materials.

WHAT IT'S FOR

- Removes post-application deposits and building-site dirt.
- Eliminates saline efflorescences from terracotta.
- Eliminates lime-scale from floors, showers, bathroom fittings.
- Thoroughly cleans outdoor floors.
- It removes cementitious deposits and cleans at the same time because it also contains surfactants.
- Effective against rust stains.

ADVANTAGES

- Buffered acid, does not produce harmful fumes for the user and the environment: it does not contain hydrochloric acid.
- Does not change the appearance or colour of materials.
- It cleans but does not attack.
- Does not affect grouting.
- Does not ruin profiles or items in aluminium and steel (kitchen hoods, pipes...).
- Can be used on many surfaces, terracotta, porcelain and ceramic tiles, and acid resistant stone.
- Has many functions: it can clean and remove deposits according to dilution.
- It is also effective in removing grout residues.

COVERAGE

With one litre:

Terracotta 1:5.	10/20 m ²
Porcelain tiles 1:5.	40 m ²
Natural stone 1:5-1:10	20/35 m ²

Coverage rate is approximate

HOW TO USE IT

Dilution: between 1:5 and 1:10 according to the level of dirt to be removed.

Application:

Washing after laying: wet the surface well with water before washing. Then use **DETERDEK** diluted at a ratio of 1:5 or 1:10 (1 litre of product in 5 or 10 litres of water). Apply the solution a few square metres at a time, then add, allow contact time of 5 minutes, then work with a single disc cleaner or large brush. Remove all residues using a cloth or liquid vacuum and rinse with plenty of water. Should any stubborn dirt remain, repeat the wash with more concentrated solutions.

For extraordinary maintenance on outdoor surfaces with clear signs of ageing (smog, dust...): dilute 1 litre of product in 10 litres of water. Then follow the same application procedures described above.

Caution:

Do not use on polished marble or on any materials that are sensitive to acids. Before using on this material, carry out a test on a small surface area to check that it is actually resistant to the product. For items in aluminium, follow the instructions and use a soft sponge.

Packaging

1 litre cans in boxes of 12.
5-litre cans in boxes of 4.

WARNINGS

- Keep out of reach of children.
- Do not disperse into the environment after use.

TEMPERATURES

Storage temperature: from 5° to 30° C.
The product should be applied to materials with temperature between 5° and 30°C.

CONTAINS

Non-ionic surfactants less than 5%.
Other ingredients: perfume.

LABELLING

Warning: Danger
Hazard indication:
Causes serious eye damage.
Causes skin irritation.

Caution recommendations:

If medical advice is needed, have product container or label at hand. Keep out of reach of children. Wear protective gloves / eye protection / face protection. IF ON SKIN: wash with plenty of water. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER / doctor. Take off contaminated clothing and wash it before reuse. Contains: PHOSPHORIC ACID. Alcohols C12-14, ethoxylated.




TECHNICAL FEATURES

Appearance: liquid
Odour: pungent with flowery perfume
Density: 1.12 kg/l
pH: 1.5 (solut. 10% in water)

This information is the result of our most up-to-date technical know-how and is based on ongoing laboratory research and testing. Nevertheless, for reasons beyond our control, any suggestions always require appropriate analysis, testing and monitoring. Fila shall not accept any responsibility for improper use of its products.

END-OF-WORK CLEANING

**PORCELAIN TILES, GLAZED CERAMIC
TILES, ACID-RESISTANT STONE SURFACES,
TERRACOTTA, QUARRY TILES**

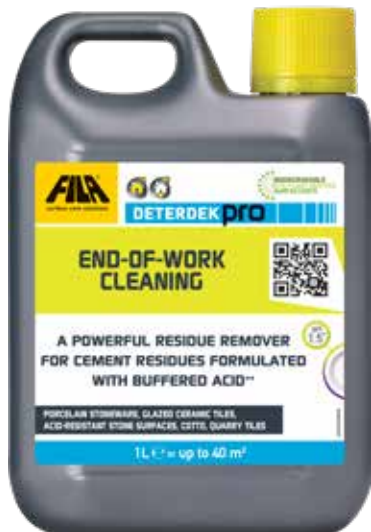

BIODEGRADABLE, WITH PLANT-DERIVED SURFACTANTS
BUFFERED ACID: exerts a controlled and effective action over time, does not release dangerous fumes during use.



COVERAGE (1 LITRE)

Terracotta 1:5	10/20 m ²
Porcelain tiles 1:5	40 m ²
Natural stone 1:5-1:10	20/35 m ²

The coverage is purely indicative

Packaging

1 litre cans in boxes of 12.
5-litre cans in boxes of 4.

WARNINGS

- Keep out of reach of children.
- Do not disperse into the environment after use.

TEMPERATURES

Storage temperature: from 5° to 30° C.
The product should be applied to materials with temperature between 5° and 30°C.

WHAT IT'S FOR

- Detergent for end-of-installation washing
- Removes post-application deposits and building-site dirt.
- Eliminates saline efflorescences from terracotta.
- Eliminates lime-scale from floors, showers, bathroom fittings.
- Thoroughly cleans outdoor floors.
- It removes deposits and cleans at the same time because it also contains surfactants.
- Effective against rust stains.
- It helps to remove signs of engobing on ceramic and porcelain stoneware surfaces.

ADVANTAGES

- Buffered acid, does not produce harmful fumes for the user and the environment: it does not contain hydrochloric acid.
- Does not change the appearance or colour of materials.
- It cleans but does not attack.
- Does not affect grouting.
- Does not ruin profiles or items in aluminium and steel (kitchen hoods, pipes...).
- Can be used on many surfaces, terracotta, porcelain and ceramic tiles, and acid resistant stone.
- Has many functions: it can clean and remove deposits according to dilution.
- It is also effective in removing grout residues.

HOW TO USE IT

Dilution:

between 1:5 and 1:10 according to the level of dirt to be removed.

Application:

For washing after laying and for end-of-work cleaning:

wet the surface well with water before washing. Then use **ETERDEK PRO** diluted at a ratio of 1:5 or 1:10 (1 litre of product in 5 or 10 litres of water). Apply the solution a few square metres at a time, then add, allow contact time of 5 minutes, then work with a single disc cleaner or large brush.

Remove any residues using a cloth or liquid vacuum cleaner and rinse with abundant water. Should any stubborn dirt residues remain, repeat the wash with more concentrated solutions.

For extraordinary maintenance on outdoor surfaces with clear signs of ageing (smog, dust...):

dilute 1 litre of product in 10 litres of water. Then follow the same application procedures described above.

Caution:

Do not use on polished marble or on any materials that are sensitive to acids.

Before using on this material, carry out a test on a small surface area to check that it is actually resistant to the product.

For items in aluminium, follow the instructions and use a soft sponge.